

TS1000/TS1200/TS1500

High Temperature Heating Stages



High Temperature

Accurate temperature control from ambient up to 1500°C at rates from 0.1°C to 200°C/min

Enclosed Sample Chamber

The ceramic sample cup and heat shield provide an enclosed micro-oven

Imaging Techniques

Compatible with light microscopy, Raman, X-ray and more

Introducing the TS Series

Linkam's TS series of high temperature stages provides the perfect platform for the characterisation of samples such as ceramics, alloys, high temperature polymers and geological fluid inclusions, and can be used with light microscopy, Raman and X-ray.

The sample is placed inside the ceramic sample cup where it is heated from underneath as well as from the sides. A ceramic heat shield is placed over the top to prevent heat escaping from this micro-oven. The temperature can accurately be heated up to an impressive 1500°C at a maximum rate of 200°C/min. The stage body and large diameter quartz lid window are kept at a safe temperature by sealed circulating water. Precision quick-release gas connectors at the sides of the stage body can be used to purge the sample chamber with inert gas.

A system requires both a TS high temperature stage and a T96-S controller, which is available with either LINK software for computer control, or a LinkPad touch screen for stand-alone control.

Application-specific versions of the stage that are vacuum compatible, or have electrical connections, are also available.



Features

HIGH TEMPERATURE

Optimised for the study of ceramics, composites, metals and geological samples with temperatures ranging from ambient up to 1500°C. The stage body is water-cooled for work above 300°C.

HEATING RATES

Wide range of heating rates from 0.1°C up to 200°C/min, ideal for state transition experiments.

TEMPERATURE CONTROL ACCURACY

The T96-S controller accurately controls temperature to one degree.

ELECTRICAL CONNECTIONS AND GAS PORTS

Alternative versions with electrical connections for sample measurement are available. Simple and easy stage purging with quick-release gas ports to allow atmospheric composition control.

VACUUM

Alternative versions with vacuum connectors and a Pirani vacuum gauge are available enabling the vacuum value to be displayed on the LinkPad screen or through LINK software.

ELLIPSOMETER

Developed in collaboration with world leading ellipsometer manufacturers the TSEL1000 variant is also available.

CUSTOM OPTIONS

Please contact us with details of your requirements.

Application Examples

Linkam's TS series can be used to safely recreate a high temperature environment where rapid heating rates and accurate temperature control is essential. Application examples include:


Earth Sciences and Geology

The TS stages are used extensively in geological research, including the study of volcanic matter or igneous rock formation. The TS series provides precision high temperature control in combination with many microscopy and spectroscopic characterisation techniques.

Fluid Inclusions

Thermal Maturation

Volcanology

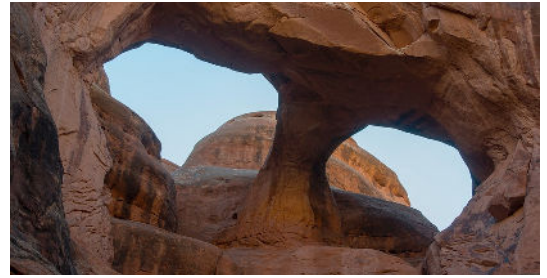

Materials and Metallurgy

From ceramics to metal composites, alloys and ores, Linkam's TS series can characterise the high temperature properties of all types of metallic and ceramic materials.

Iron Ore

Ceramics

Oxidation



Plastics and Polymers

Use Linkam's TS series to observe and characterise the behaviour and degradation of thermoplastics or polymeric samples designed to withstand high temperatures.

Melting Point Analysis

Powder Composition

Degradation



Technical Specification

| | TS1000 | TS1200 | TS1500 |
|--|--------------------|--------------------|--|
| Temperature Range | Ambient to 1000°C | Ambient to 1200°C | Ambient to 1500°C |
| Heating/Cooling Rates | 0.1°C to 200°C/min | 0.1°C to 200°C/min | 0.1°C to 200°C/min |
| Temperature Stability | < 1°C | < 1°C | < 1°C |
| Sample Cup Sizes | 17mm ø x 3mm depth | 10mm ø x 5mm depth | 7mm ø x 3mm depth 7mm ø x 6mm depth |
| Objective Lens Working Distance | 7.0mm | 8.5mm | 6.0mm 9.0mm |
| Light Aperture | 1.7mm | 1.7mm | 1.7mm |

Discover More...




Control Options

Take control of your experiment with LINK software, or the stand-alone LinkPad touch screen, alongside the T96 temperature controller.

Both LINK software and LinkPad share a unified user interface that can control and monitor temperature and many other parameters including vacuum, humidity, tensile and shear force (dependent on system). The LinkPad provides an easy-to-use interface to the T96, for total control without a PC. Profiles with up to 100 ramps can be programmed, allowing simulation of complex processes.

LINK software enhances this with data-logging functions and real time graphical feedback. Optional modules to enhance your system include the LINK Imaging Module for synchronised image capture, the LINK Extended Measurements module to measure key image features, the LINK 21CFR11 Module for data regulatory compliance, and LINK TASC providing image-based thermal analysis.

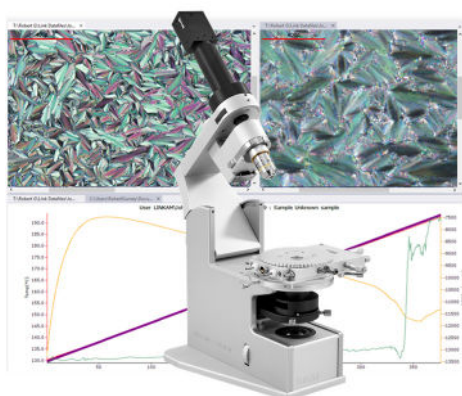

Imaging Station

The Imaging Station provides a digital imaging platform compatible with Linkam temperature and environmental control systems. Use our high-resolution camera to capture images and videos of your samples while controlling the temperature and environmental conditions.

The Imaging Station has been specially designed with a pivoted mechanism to allow greater access to your Linkam stage, making it quick and easy to access the chamber and change samples. It has a built-in LED light source for transmitted light with further options available for reflected light, polarisation and phase contrast imaging.

The Imaging Station is also compatible with a range of long working distance objective lenses which can be easily switched with the quick-release mechanism.



CCR1000

The CCR1000 Catalyst Cell Reactor is a versatile stage that has been designed to study catalytic reactions at high temperature and pressure.

The stage is designed with optical access to the reaction chamber making it ideal for use with reflected light microscopy and spectroscopic techniques including Raman and FT-IR microscopy such as Operando.

Temperature is accurately controlled by the Linkam T96-S controller (via the S-type platinum/rhodium thermocouple) which can heat samples up to an impressive 200°C/min.

Contact Details


Linkam Scientific Instruments Ltd.
Unit 8 Epsom Downs Metro Centre
Waterfield
Tadworth
KT20 5LR
United Kingdom

We make scientific instruments that help characterise materials from polymers to biological tissue and metals to composites. Our instruments are used for research by the world's most advanced scientific organisations and companies. Each of our instruments are designed and manufactured in-house by our team of highly experienced electronics, software and mechanical design engineers. We design and develop solutions for sample characterisation by collaborating with the best scientists in the world. Will you be next?

Linkam products are constantly being improved, hence specifications are subject to change without notice.
TASC products are a family of techniques developed by Prof. Mike Reading (Cyversa) and Linkam.



 www.linkam.co.uk

 +44 (0)1737 363476

 info@linkam.co.uk